

JL4200B

Image Controller for Digital Photo Reader



JEILIN Technology Co., Ltd.

8F, No.179, Jian Yi Rd., Chung Ho,
Taipei Hsien, Taiwan

TEL : 886-2-82215466 FAX : 886-2-82215456



Table of Contents

| | |
|-----------------------------------------------|----|
| 0. Revision History | 3 |
| 1. Generation Description..... | 4 |
| 2. Features | 5 |
| 3. Applications | 7 |
| 4. Functional Block Diagram..... | 8 |
| 5. Pin Description and Pin Configuration..... | 9 |
| 6. Electrical Characteristics | 16 |
| 7. Package Outline and Dimension | 17 |



0. Revision History

| Revision | Description of Changes | Date |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 1.0 | First Release | 2003/06/05 |
| 1.1 | Change pin names and description | 2003/7/1 |
| 1.2 | Change SD_PROTECT description | 2003/7/7 |
| 1.3 | 1. Re-format the document 2. Correct some un-documented description | 2003/9/18 |
| 2.0 | Change JL4200A to JL4200B. (JL4200A has been phased out.) | 2003/11/13 |
| 2.2 | Re-name the pin name of GPIO. | 2004/02/12 |
| 2.3 | Add audio function 1. Modify Feature 2. Block Diagram 3. Pin Definition for Audio Function | 2004/04/14 |
| 2.31 | Change the pin description of pin 179 and 180. | 2004/05/10 |
| 2.4 | Modify Block Diagram in page 6. ● Add "LCD TV" block through CCIR601/656 signal. | 2004/10/08 |
| 2.41 | Correct the typo of Block Diagram in page 6. ● USB1.1 → USB2.0 | 2004/10/11 |
| 2.5 | Correct the typo in Pin Definition of pin 195, which should be high-active, not low-active signal for Card Protection ● /SD_PROTECT → SD_PROTECT | 2004/11/15 |
| 2.6 | Fix the major error in pin definition of pin 3 and pin 4. These pins can only be used as output pin, but we wrongly define it as GPIO. | 2005/01/26 |
| 2.7 | Change the pin definition of pin 3 and pin 4. | 2005/07/01 |
| 2.8 | 1. Modify Features paragraph. 2. Add AVI specification. 3. Add more description in the Application paragraph. 4. Add more description in pin 3 and pin 4. ● Pin 3: Since JL4200B pin 3 is internally connected to the function block of USB Resume, pin 3 must be held at HIGH while USB_PLUG is ON. ● Note: Both pin 3 and pin 4 can only be used as output pin. | 2005/11/14 |
| 2.9 | Modify specification of AVI playback in page 5. ● Change frame rate of QVGA playback to 10 fps. ● Change frame rate of VGA playback to 5 fps. | 2005/12/16 |
| 3.0 | Standardize the Jeilin company logo. | 2006/01/23 |
| | | |



1. Generation Description

JL4200B is an image controller for so-called Photo Viewer, Digital Photo Reader and Digital Photo Frame. It consists of memory card interface, USB 2.0 interface, embedded Turbo 8051, JPEG Decoder, Audio/Video DAC, and CCIR601/656 interface.

Nowadays, DSC (Digital Camera) is more and more popular with customers of traditional film camera, so a lot of people use memory card to store their photos instead of traditional film. JL4200B is a good solution to most of camera users who they can directly view the photos in TV or LCD display. Besides the application for Photo Viewer, JL4200B solution can also be used as normal USB2.0 Card Reader.

JL4200B system supports several different kinds of memory cards such CompactFlash (MicroDrive), SmartMedia (xD), SD (Mini-SD), MMC (RS-MMC), and even 2.5" or 1.8" Hard Disk Drive.



2. Features

- 1) Jpeg (still photo) Display
 - Non-progressive Jpeg
 - Maximal supported Jpeg resolution: 16,384 pixels (Horizontal) X Unlimited (Vertical)

2) AVI Playback

- AVI file format: Only support motion Jpeg.
- Audio: Only support PCM format.
- QVGA:

| JL4200B Playback Frame Rate for QVGA AVI | | |
|------------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AVI with audio data | Video | 1. 10 fps with frame loss (original frame rate > 10 fps) 2. 10 fps (original frame rate = 10 fps) 3. Same with original frame rate (original frame rate < 10 fps) Note: Playback frame rate will be downed to 5 fps if the memory card is MMC version 1. |
| | Audio | 1. Audio format : PCM 2. Channel : 1 (Mono) 3. Bit width per sample : 8 4. Samples per second : ≤ 11,025 |
| AVI without audio data | Video: Without frame loss | |

- VGA:

| JL4200B Playback Frame Rate for VGA AVI | | |
|-----------------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AVI with audio data | Video | 1. 5 fps with frame loss (original frame rate > 5 fps) 2. 5 fps (original frame rate = 5 fps) 3. Same with original frame rate (original frame rate < 5 fps) Note: Playback frame rate will be downed to 3 fps if the memory card is MMC version 1. |
| | Audio | 1. Audio format : PCM 2. Channel : 1 (Mono) 3. Bit width per sample : 8 4. Samples per second : ≤ 11,025 |
| AVI without audio data | Video: Without frame loss | |

- 3) Support 6 different kinds of memory card
 - CompactFlash card and MicroDrive



- SmartMedia and xD card
- SecureDisk (SD), Mini-SD, MultiMedia (MMC), and RS-MMC card
- 4) Compact Flash Interface
 - Fully compliant with Compact Flash (CF) v1.4 Specification
 - Support part of the CF-ATA commands
 - Using True IDE Mode to access CF Card
- 5) SmartMedia Interface
 - Compliant SmartMedia version 1.00 standard
- 6) SD Interface
 - Compliant Secure Digital Specification Version 1.01 SPI mode
- 7) USB2.0 Interface
 - Conform to USB 2.0 specification
 - Faster Transfer
 - Backward compatible with USB1.1 Interface
 - Conform to USB Mass Storage Class Specification, Version 1.0 (Bulk Only Transport)
 - Supports one control pipe, one bulk in pipe, and one bulk out pipe
- 8) Support Mass Storage Class Specification
 - No Device Driver is required for Windows Me, 2000, and XP, Mac OS 9.x, OS 10.x.
 - Jeilin provides a proprietary device driver for Windows 98SE.
- 9) Video Interface
 - Composite Video: One TV Encoder is embedded to directly output Composite video to TV without extra DAC.
 - S-Video: Need one external TV Encoder that has two DAC inside. Image quality of S-Video is better than Composite Video because Luminance signal and Chroma signal is separated.
 - CCIR601/656 Video: Directly send digital video signal to LCD panel without signal loss due to Digital-to-Analog Conversion in JL4200B and Analog-to-Digital Conversion in LCD panel, therefore image quality is better than composite video and S-Video.
- 10) Support CCIR601/656 interface to output digital signal to following display devices:
 - LCD TV
 - LCD Panel
 - Traditional TV with S-Video input
- 11) SDRAM size: ≥ 4 MW
- 12) Support NTSC/PAL format.
- 13) Embedded Turbo 8051
 - Embedded 8KB SRAM
 - Embedded 64KB ROM
 - Provide one external interrupt input
 - Provide one UART port
- 14) External Program Memory




- 64KB, 128KB, 256KB, and 512KB flash ROM are supported.
 - Support external SRAM for other application.
- 15) Support In-circuit Programming (ISP) function
- ISP provides an easy way to upgrade the firmware using memory card.
- 16) Support infrared remote control.
- 17) 3.3/2.5V, 208-pin PQFP package

3. Applications

- 1) USB2.0 Card Reader with TV Output
- 2) Digital Photo Frame
- 3) Photo Viewer
- 4) Photo Bank
- 5) Photo Reader in LCD TV



4. Functional Block Diagram

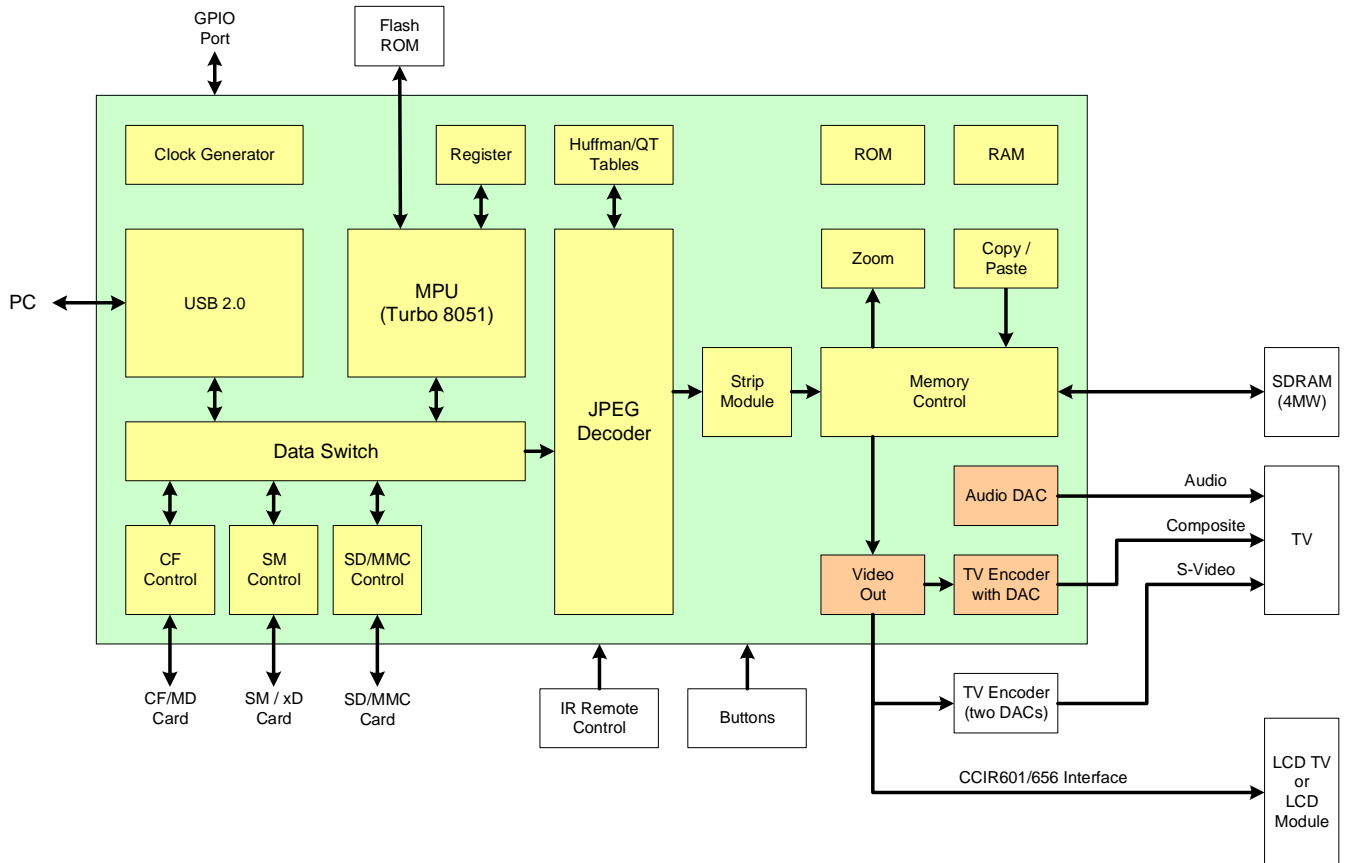

**5. Pin Description and Pin Configuration**

| Pin No. | Pin Name | Type | Description |
|---------|-------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | M_SCLK | O4 | Memory Clock Output |
| 2 | M_BS | O4 | Memory Bus State Output |
| 3 | GPO1 | B8, U | General Purpose Out 1 → MPU P1.0 Note: Since JL4200B pin 3 is internally connected to the function block of USB Resume, pin 3 must be held at HIGH while USB_PLUG is ON. |
| 4 | GPO2 | B8, U | General Purpose Out 2 → MPU P1.1 |
| 5 | CF_D0 | B4 | CF Data Bus |
| 6 | CF_D1 | B4 | CF Data Bus |
| 7 | DAC_VREF | AO | Voltage Reference |
| 8 | CF_D2 | B4 | CF Data Bus |
| 9 | CF_D3 | B4 | CF Data Bus |
| 10 | CF_D4 | B4 | CF Data Bus |
| 11 | CF_D5 | B4 | CF Data Bus |
| 12 | CF_D6 | B4 | CF Data Bus |
| 13 | CF_D7 | B4 | CF Data Bus |
| 15 | CF_D8 | B4 | CF Data Bus |
| 16 | CF_D9 | B4 | CF Data Bus |
| 17 | CF_D10 | B4 | CF Data Bus |
| 18 | CF_D11 | B4 | CF Data Bus |
| 19 | CF_D12 | B4 | CF Data Bus |
| 20 | CF_D13 | B4 | CF Data Bus |
| 22 | CF_D14 | B4 | CF Data Bus |
| 23 | CF_D15 | B4 | CF Data Bus |
| 24 | /CF_CS0 | O4 | CF Chip Select 0 in True IDE mode |
| 25 | /CF_CS1 | O4 | CF Chip Select 1 in True IDE mode |
| 26 | CF_A0 | O4 | CF Address Line |
| 27 | CF_A1 | O4 | CF Address Line |
| 28 | CF_A2 | O4 | CF Address Line |
| 29 | /CF_CD1 | I, S, U | CF Card Detection: This pin is connected to ground within CF card when the CF card is inserted. |
| 30 | /CF_PWR_ON | O4 | This pin is used to turn on the power of CF card. |
| 31 | SPI_DATA_IN | I, U | SD Data Input |
| 32 | SPI_CLK | O2 | SD Clock Output |



| Pin No. | Pin Name | Type | Description |
|---------|--------------|---------|---------------------------------------------------------------------------------------------------------|
| 33 | /SPI_CS | O2 | SD Chip Select Output |
| 34 | SPI_DATA_OUT | O2 | SD Data Output |
| 35 | /CF_IOR | O4 | This pin is a read-strobe control to CF card. |
| 36 | /CF_IOW | O4 | This pin is a write-strobe control to CF card. |
| 37 | /SMC_WR | O2 | SMC Write Enable |
| 38 | /SMC_RD | O2 | SMC Read Enable |
| 39 | /SMC_WP | O2 | SMC Write Protection |
| 41 | SMC_READY | I | SMC Ready/Busy → 1: Ready, 0: Busy |
| 42 | SMC_LVD | I | SMC Low Voltage Detect |
| 43 | /SMC_CE | O2 | SMC Card Enable |
| 44 | /SMC_CD | I, S | SMC Card Detect: This is the card detection signal from SM card to indicate if the card is inserted. |
| 45 | M_SDIO0 | B4 | Memory Serial Data Line |
| 46 | M_SDIO1 | B4 | Memory Parallel Data Line |
| 48 | /SMC_PROTECT | I, S | SMC Write Protection |
| 49 | /SMC_INSERT | I, S | SMC Card Insertion: This pin is Low when SmartMedia Card is inserted. |
| 50 | SMC_D0 | B2 | SMC Data/Address/Command bus |
| 51 | SMC_D1 | B2 | SMC Data/Address/Command bus |
| 52 | SMC_D2 | B2 | SMC Data/Address/Command bus |
| 53 | SMC_D3 | B2 | SMC Data/Address/Command bus |
| 54 | SMC_CLE | O2 | SMC Command Latch Enable |
| 55 | USB_PLUG | I, S | USB Insertion: This pin is High when USB cable is plugged. |
| 56 | SMC_ALE | O2 | SMC Address Latch Enable |
| 57 | SMC_D4 | B2 | SMC Data/Address/Command Bus |
| 58 | SMC_D5 | B2 | SMC Data/Address/Command Bus |
| 59 | SMC_D6 | B2 | SMC Data/Address/Command Bus |
| 60 | SMC_D7 | B2 | SMC Data/Address/Command Bus |
| 61 | /RESET | I, S, U | Power-on Reset |
| 63 | ROM_A0 | O2 | FlashROM Address Bus |
| 64 | ROM_A1 | O2 | FlashROM Address Bus |
| 65 | ROM_A2 | O2 | FlashROM Address Bus |
| 67 | ROM_A3 | O2 | FlashROM Address Bus |



| Pin No. | Pin Name | Type | Description |
|---------|------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 68 | ROM_A4 | O2 | FlashROM Address Bus |
| 69 | ROM_A5 | O2 | FlashROM Address Bus |
| 70 | ROM_A6 | O2 | FlashROM Address Bus |
| 71 | ROM_A7 | O2 | FlashROM Address Bus |
| 72 | ROM_A8 | O2 | FlashROM Address Bus |
| 74 | ROM_A9 | O2 | FlashROM Address Bus |
| 75 | ROM_A10 | O2 | FlashROM Address Bus |
| 76 | ROM_A11 | O2 | FlashROM Address Bus |
| 77 | ROM_A12 | O2 | FlashROM Address Bus |
| 78 | ROM_A13 | O2 | FlashROM Address Bus |
| 79 | ROM_A14 | O2 | FlashROM Address Bus |
| 81 | ROM_A15 | O2 | FlashROM Address Bus |
| 82 | M_SDIO2 | B4 | Memory Parallel Data |
| 83 | M_SDIO3 | B4 | Memory Parallel Data |
| 84 | INT | I, D | External Interrupt Input |
| 85 | /ROM_RD | O2 | Read Strobe of FlashROM |
| 86 | /ROM_WR | O2 | Write Strobe of FlashROM |
| 87 | ROM_D0 | B2 | FlashROM Data Bus |
| 88 | ROM_D1 | B2 | FlashROM Data Bus |
| 89 | ROM_D2 | B2 | FlashROM Data Bus |
| 90 | ROM_D3 | B2 | FlashROM Data Bus |
| 91 | ROM_D4 | B2 | FlashROM Data Bus |
| 92 | ROM_D5 | B2 | FlashROM Data Bus |
| 93 | ROM_D6 | B2 | FlashROM Data Bus |
| 94 | ROM_D7 | B2 | FlashROM Data Bus |
| 95 | /MEMORY_WR | O4 | Write Strobe of External SRAM |
| 96 | /CPU_EA | I, U | 0: External Program Memory 1: Internal Program Memory |
| 97 | /MEMORY_RD | O4 | Read Strobe of External SRAM |
| 100 | XTAL_IN | ICLK | Crystal terminal or Oscillator Input: Frequency of crystal or oscillator can be chosen either 12 or 30 MHz. Pin 177 (XTAL_SEL) is used to select which frequency is chosen. |
| 101 | XTAL_OUT | OCLK | Crystal terminal |
| 104 | PHY_REF | USB | Connect an external resistor (12K ohm +/- 1%) to AGND. |



| Pin No. | Pin Name | Type | Description |
|---------|----------|-------|--------------------------------------------------------------------------------------------|
| 105 | PHY_DM | USB | USB2.0 Data Line (-) |
| 106 | PHY_DP | USB | USB2.0 Data Line (+) |
| 108 | PHY_RPU | USB | Connect an external resistor (1.5 K ohms +/- 1%) to VCCA3.3V. |
| 109 | PHY_DMRS | USB | USB1.1 Data Line (-): Connect to pin PHY_DM through an external resistor (39 ohms +/- 1%). |
| 110 | PHY_DPRS | USB | USB1.1 Data Line (+): Connect to pin PHY_DP through an external resistor (39 ohms +/- 1%). |
| 114 | GPIO16 | B8, U | General Purpose I/O 16 → MPU P3.0 (RXD) |
| 115 | GPIO17 | B8, U | General Purpose I/O 17 → MPU P3.1 (TXD) |
| 116 | GPIO18 | B8, U | General Purpose I/O 18 → MPU P3.4 |
| 117 | GPIO8 | B8, U | General Purpose I/O 8 or Auxiliary Port 0 → MPU P2.0 |
| 118 | GPIO9 | B8, U | General Purpose I/O 9 or Auxiliary Port 1 → MPU P2.1 |
| 119 | GPIO10 | B8, U | General Purpose I/O 10 or Auxiliary Port 2 → MPU P2.2 |
| 120 | GPIO11 | B8, U | General Purpose I/O 11 or Auxiliary Port 3 → MPU P2.3 |
| 121 | GPIO12 | B8, U | General Purpose I/O 12 or Auxiliary Port 4 → MPU P2.4 |
| 122 | GPIO13 | B8, U | General Purpose I/O 13 or Auxiliary Port 5 → MPU P2.5 |
| 123 | GPIO14 | B8, U | General Purpose I/O 14 or Auxiliary Port 6 → MPU P2.6 |
| 124 | GPIO15 | B8, U | General Purpose I/O 15 or Auxiliary Port 7 → MPU P2.7 |
| 125 | GPIO0 | B8, U | General Purpose I/O 0 → MPU P0.0 |
| 126 | GPIO1 | B8, U | General Purpose I/O 1 → MPU P0.1 |
| 128 | GPIO2 | B8, U | General Purpose I/O 2 → MPU P0.2 |
| 129 | GPIO3 | B8, U | General Purpose I/O 3 → MPU P0.3 |
| 130 | GPIO4 | B8, U | General Purpose I/O 4 → MPU P0.4 |
| 131 | GPIO5 | B8, U | General Purpose I/O 5 → MPU P0.5 |
| 132 | GPIO6 | B8, U | General Purpose I/O 6 → MPU P0.6 |
| 133 | GPIO7 | B8, U | General Purpose I/O 7 → MPU P0.7 |
| 135 | SDRAM_A0 | O2 | SDRAM Address Bus |



| Pin No. | Pin Name | Type | Description |
|---------|------------|------|-----------------------------|
| 136 | SDRAM_A1 | O2 | SDRAM Address Bus |
| 137 | SDRAM_A2 | O2 | SDRAM Address Bus |
| 138 | SDRAM_A3 | O2 | SDRAM Address Bus |
| 139 | SDRAM_A4 | O2 | SDRAM Address Bus |
| 140 | SDRAM_A5 | O2 | SDRAM Address Bus |
| 141 | SDRAM_A6 | O2 | SDRAM Address Bus |
| 142 | SDRAM_A7 | O2 | SDRAM Address Bus |
| 143 | SDRAM_A8 | O2 | SDRAM Address Bus |
| 144 | SDRAM_A9 | O2 | SDRAM Address Bus |
| 145 | SDRAM_A10 | O2 | SDRAM Address Bus |
| 146 | SDRAM_A11 | O2 | SDRAM Address Bus |
| 147 | SDRAM_CLK | O2 | SDRAM Clock Input |
| 148 | SDRAM_A12 | O2 | SDRAM Address Bus |
| 149 | SDRAM_UDQM | O2 | SDRAM Input/output Mask |
| 150 | /SDRAM_CAS | O2 | SDRAM Column Address Strobe |
| 151 | /SDRAM_RAS | O2 | SDRAM Row Address Strobe |
| 152 | /SDRAM_WR | O2 | SDRAM Write Enable |
| 156 | SDRAM_BS0 | O2 | SDRAM Bank Select |
| 157 | SDRAM_BS1 | O2 | SDRAM Bank Select |
| 158 | SDRAM_D0 | B2 | SDRAM Data Bus |
| 159 | SDRAM_D1 | B2 | SDRAM Data Bus |
| 160 | SDRAM_D2 | B2 | SDRAM Data Bus |
| 161 | SDRAM_D3 | B2 | SDRAM Data Bus |
| 162 | SDRAM_D4 | B2 | SDRAM Data Bus |
| 164 | SDRAM_D5 | B2 | SDRAM Data Bus |
| 165 | SDRAM_D6 | B2 | SDRAM Data Bus |
| 166 | SDRAM_D7 | B2 | SDRAM Data Bus |
| 167 | SDRAM_D8 | B2 | SDRAM Data Bus |
| 168 | SDRAM_D9 | B2 | SDRAM Data Bus |
| 169 | SDRAM_D10 | B2 | SDRAM Data Bus |
| 171 | SDRAM_D11 | B2 | SDRAM Data Bus |
| 172 | SDRAM_D12 | B2 | SDRAM Data Bus |
| 173 | SDRAM_D13 | B2 | SDRAM Data Bus |
| 174 | SDRAM_D14 | B2 | SDRAM Data Bus |
| 175 | SDRAM_D15 | B2 | SDRAM Data Bus |
| 177 | XTAL_SEL | I, D | Crystal Select |



| Pin No. | Pin Name | Type | Description |
|------------------|-------------|-------|-------------------------------------------------------------------------|
| | | | 0: 12Mhz, 1: 30Mhz |
| 178 | TEST | I, U | Test Pin for Tester or external clock input for USB PHY |
| 179 | CCIR_HSYNC | O2 | CCIR601 HSYNC |
| 180 | CCIR_VSYNC | O2 | CCIR601 VSYNC |
| 181 | CCIR_D0 | O2 | CCIR601/656 Data Bus |
| 182 | CCIR_D1 | O2 | CCIR601/656 Data Bus |
| 183 | CCIR_D2 | O2 | CCIR601/656 Data Bus |
| 184 | CCIR_D3 | O2 | CCIR601/656 Data Bus |
| 186 | CCIR_D4 | O2 | CCIR601/656 Data Bus |
| 187 | CCIR_D5 | O2 | CCIR601/656 Data Bus |
| 188 | CCIR_D6 | O2 | CCIR601/656 Data Bus |
| 189 | CCIR_D7 | O2 | CCIR601/656 Data Bus |
| 190 | CCIR_PCLK | O2 | CCIR601/656 Pixel Clock |
| 191 | CCIR_ENABLE | I, U | Enable or disable the function of CCIR601/656: 0: Disable, 1: Enable |
| 192 | DATA_REQ | B2, U | Data Request of Auxiliary Port |
| 193 | DATA_STROBE | B2 | Data Strobe of Auxiliary Port |
| 194 | /SD_INSERT | I, U | SD Card Insertion: This pin is Low when SD Card is inserted. |
| 195 | SD_PROTECT | I, U | SD Write Protection |
| 196 | /CF_RESET | O4 | Hardware Reset to CompactFlash Card |
| 197 | /M_INSERT | I, U | Memory Card Insertion: This pin is Low when Memory Card is inserted. |
| 198 | REMOTE_IN | I | Remote Controller Input |
| 199 | CF_INTRQ | I, D | CF Interrupt Request |
| 200 | CF_IORDY | I, U | CF Card Ready |
| 205 | TV_OUT_P | AO | Composite Video Output |
| 206 | TV_OUT_N | AO | Connect this pin to Analog Ground |
| 207 | AUDIO_OUT | AO | Audio Output |
| 14,40,80,127,153 | VCC3.3V | PWR | +3.3V I/O power |
| 102,111,113 | VCCA3.3V | PWR | +3.3V Analog power |
| 202 | VD33 | PWR | +3.3V Analog power |
| 66,154,170,185, | VCC2.5V | PWR | +2.5V core power |



| Pin No. | Pin Name | Type | Description |
|--------------------------------------|----------|------|-------------------------|
| 204 | | | |
| 98 | VCCA2.5V | PWR | +2.5V Analog power |
| | | | |
| 21,47,62,73,134, 163,176,201, 208 | GND | GND | Ground Reference |
| 99,103,107,112, 155 | AGND | GND | Analog Ground Reference |
| 203 | VS33 | GND | Analog Ground Reference |

Note:

| Type | Description |
|------|------------------------------------|
| I | Input Pin |
| O2 | Output Pin with 2 mA drive |
| O4 | Output Pin with 4 mA drive |
| O8 | Output Pin with 8 mA drive |
| B2 | Bi-directional Pin with 2 mA drive |
| B4 | Bi-directional Pin with 4 mA drive |
| B8 | Bi-directional Pin with 8 mA drive |
| U | Internal weak pull-up resistor |
| D | Internal weak pull-down resistor |
| S | Schmitt Trigger |
| USB | USB Interface |
| AO | Analog Output |
| ICLK | XTAL Clock Input |
| OCLK | XTAL Clock Output |
| PWR | Power Pin |
| GND | Ground Pin |



6. Electrical Characteristics

● Absolute Maximum Ratings

| SYMBOL | PARAMETER | RATING | UNITS |
|------------------|---------------------|------------------------------|-------|
| V _{CC} | Power Supply (3.3V) | -0.3 to 3.6 | V |
| V _{CC1} | Power Supply (2.5V) | -0.3 to 2.75 | V |
| V _{IN} | Input Voltage | -0.3 to V _{CC} +0.3 | V |
| V _{OUT} | Output Voltage | -0.3 to V _{CC} +0.3 | V |
| T _{STG} | Storage Temperature | -55 to 150 | °C |

● Recommended Operation Conditions

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS |
|------------------|-----------------------|------|-----|------|-------|
| V _{CC} | Power Supply (3.3V) | 3.0 | 3.3 | 3.6 | V |
| V _{CC1} | Power Supply (2.5V) | 2.25 | 2.5 | 2.75 | V |
| T _{OPR} | Operating Temperature | 0 | 25 | 70 | °C |

● DC Electrical Characteristics for 3.3 volts operation


(Under Recommended Operating Conditions and V_{CC} = 3.0V ~ 3.6V, T_j = 0°C to +70°C)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------|----------------------------|------------|------|-----|----------------------|-------|
| V _{IL} | Input Low Voltage | CMOS | -0.3 | | 0.8 | V |
| V _{IH} | Input High Voltage | CMOS | 2.0 | | V _{CC} +0.3 | V |
| V _{T-} | Schmitt input Low Voltage | CMOS | -0.3 | | 0.8 | V |
| V _{T+} | Schmitt input High Voltage | CMOS | 2.0 | | V _{CC} +0.3 | V |
| V _{OL} | Output low voltage | | | | 0.4 | V |
| V _{OH} | Output high voltage | | 2.4 | | | V |




7. Package Outline and Dimension

- Package Outline (208-pin PQFP)

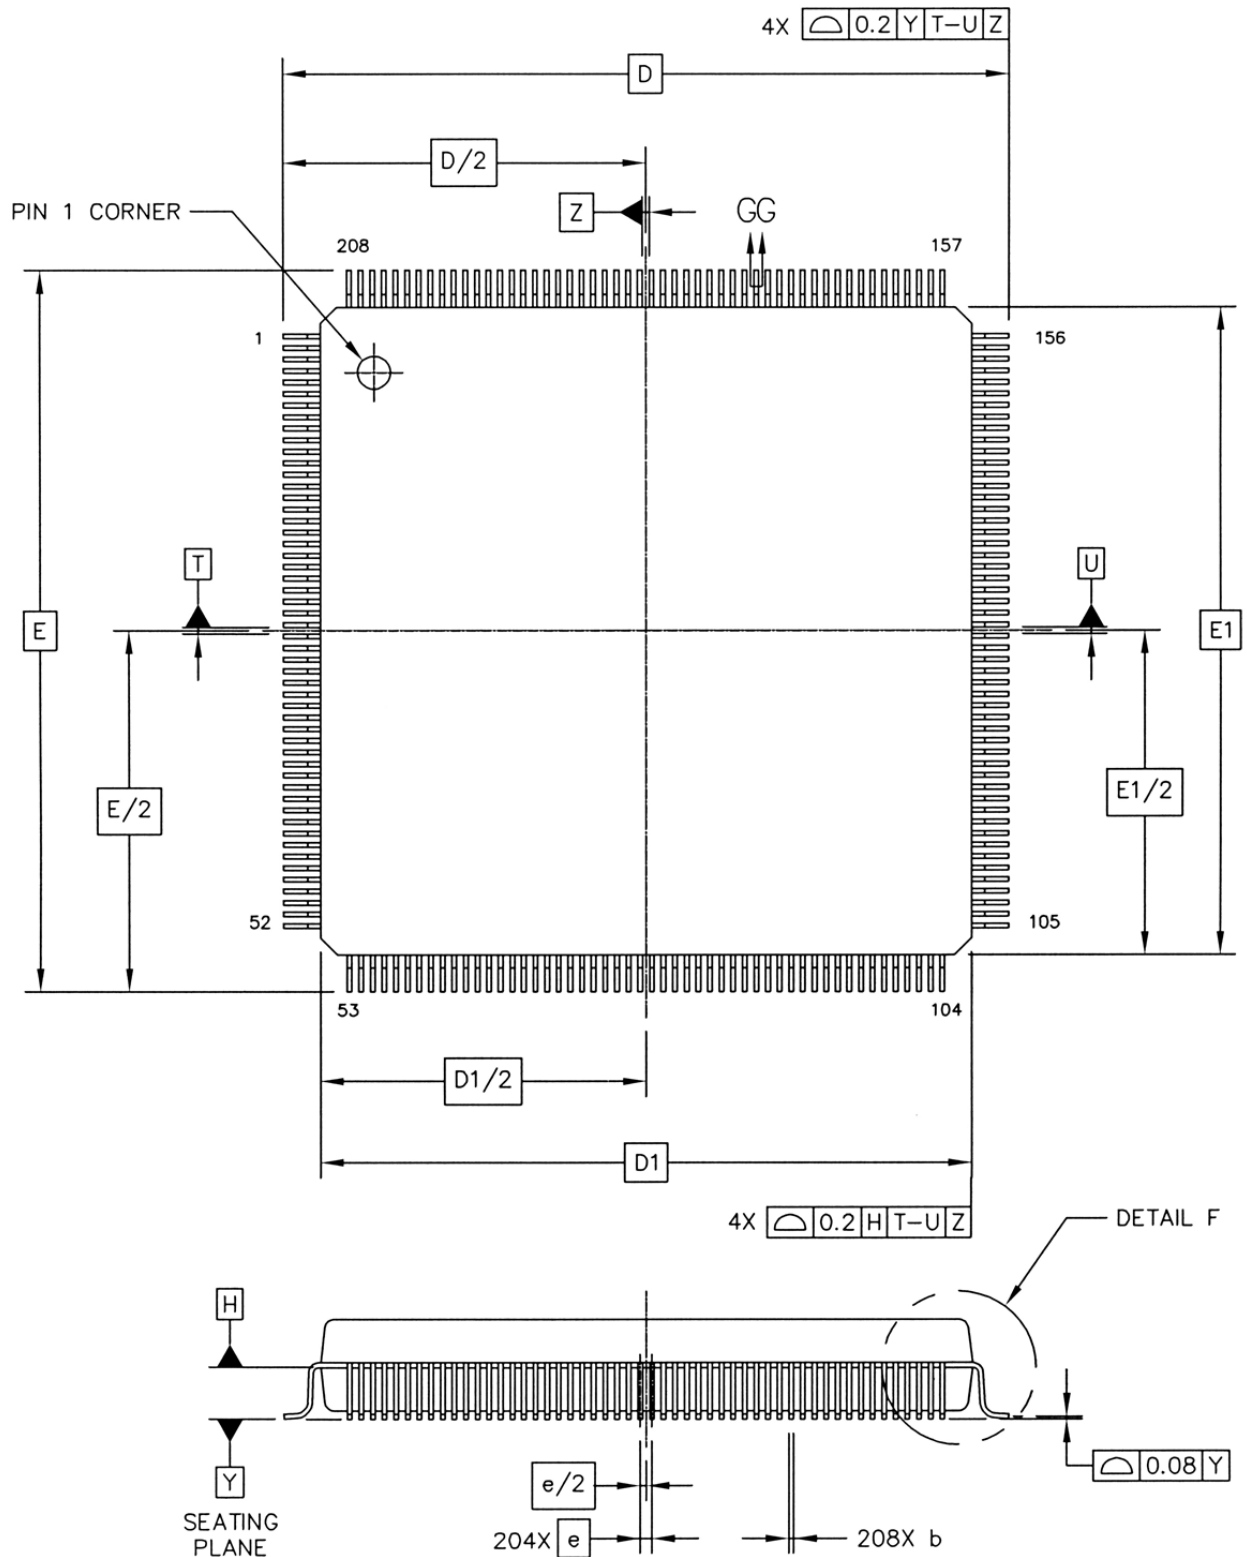




● Package Outline (208-pin PQFP) - continued

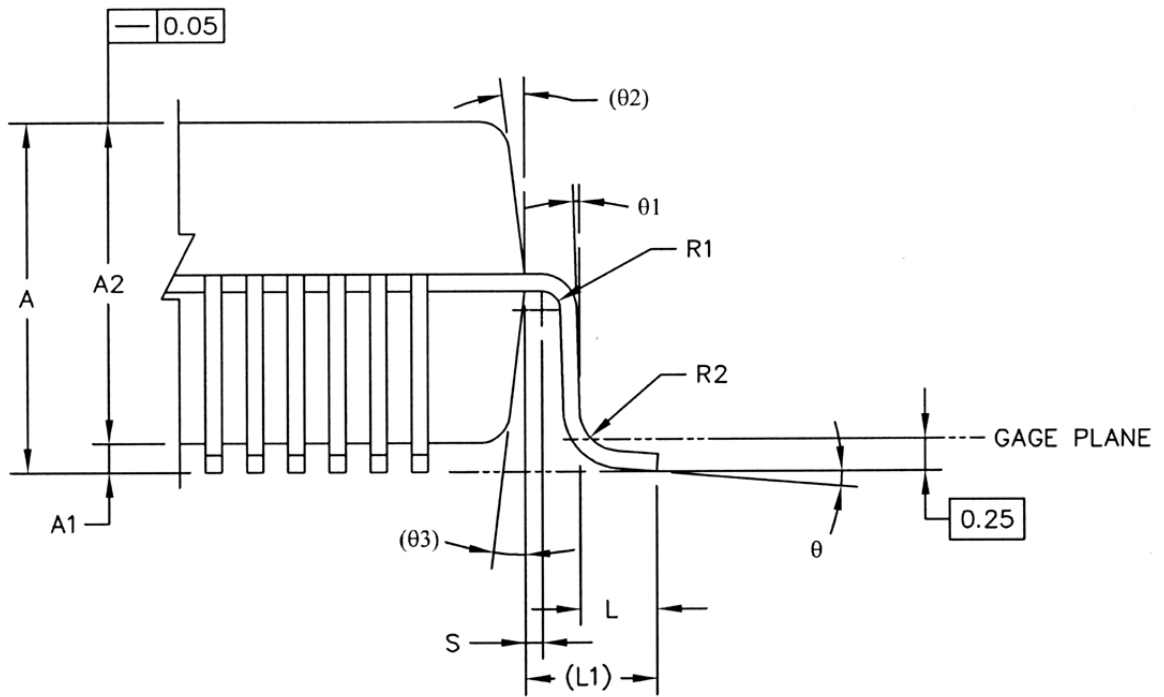

DETAIL F

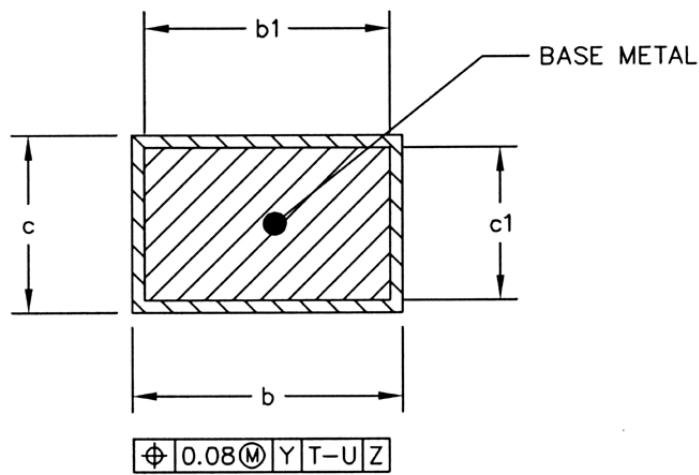

SECTION G-G



● Dimension (208-pin PQFP)

| Dimension | Min | Nom | Max |
|------------|------|----------|------|
| A | | | 4.1 |
| A1 | 0.25 | | 0.5 |
| A2 | 3.2 | 3.35 | 3.6 |
| b | 0.17 | | 0.27 |
| b1 | 0.17 | 0.2 | 0.23 |
| c | 0.09 | | 0.2 |
| c1 | 0.09 | 0.15 | 0.16 |
| D | | 30.6 BSC | |
| D1 | | 28 BSC | |
| e | | 0.5 BSC | |
| E | | 30.6 BSC | |
| E1 | | 28 BSC | |
| L | 0.45 | 0.6 | 0.75 |
| L1 | | 1.3 REF | |
| R1 | 0.08 | | |
| R2 | 0.08 | | 0.25 |
| S | 0.2 | | |
| θ | 0° | 3.5° | 8° |
| θ_1 | 0° | | |
| θ_2 | | 8°REF | |
| θ_3 | | 8°REF | |

Unit: mm

REF: Reference

BSC: Basic Spacing between Centers (integrated circuit package dimension)



JEILIN Technology Co., Ltd.

8F, No. 179, Jian Yi Rd., Chung Ho,

Taipei Hsien, Taiwan

Tel: 886-2-8221-5466

Fax: 886-2-8221-5456

Website: www.jeilin.com.tw

Email: jeilin@jeilin.com.tw

©2003 JEILIN Technology Corp., Ltd. All rights reserved.

The information in this document has been carefully checked and is believed to be reliable; however no responsibility can be assumed for inaccuracies that may not have been caught. All information in this document is subject to change without prior notice. The information contained in this document is presented only as a guide for applications of our products. No responsibility is assumed by JEILIN Technology for any infringements of intellectual property or other rights of the third parties, which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of JEILIN Technology or others. No part of this document may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of JEILIN Technology.